

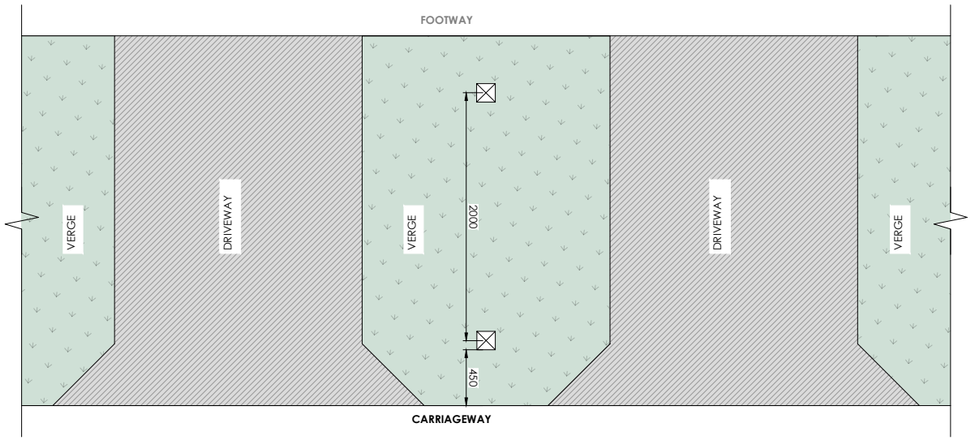



VERGES 0m < 2m
DETAIL A : TIMBER BOLLARD
SCALE - 1:25

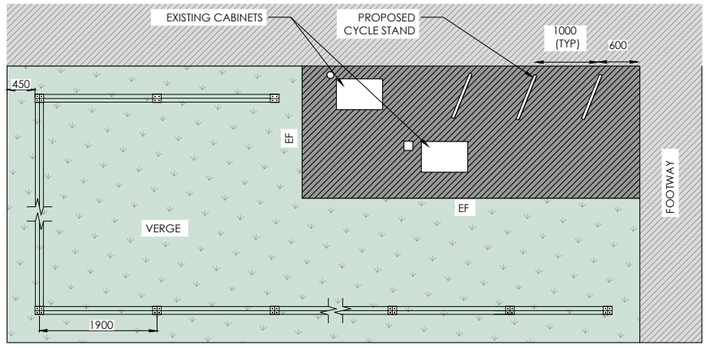


DETAIL D - VERGE DETAIL
SCALE - 1:50

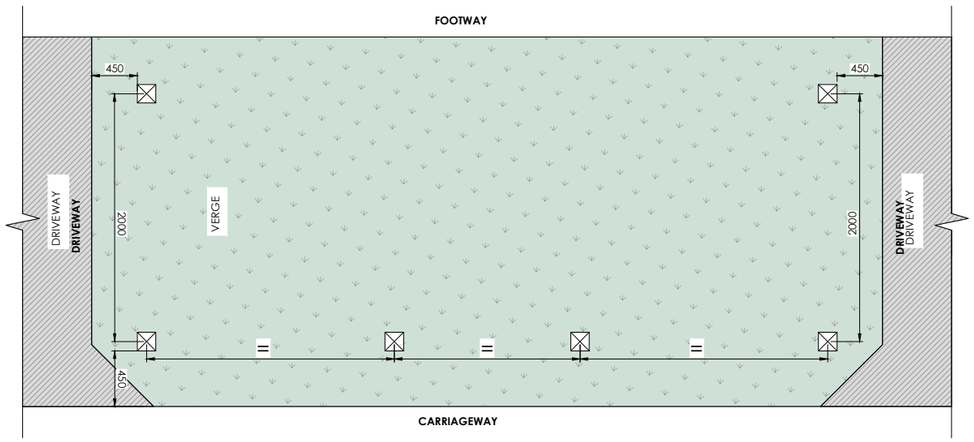


VERGES 2m < 6m
DETAIL B : TIMBER BOLLARD
SCALE - 1:25

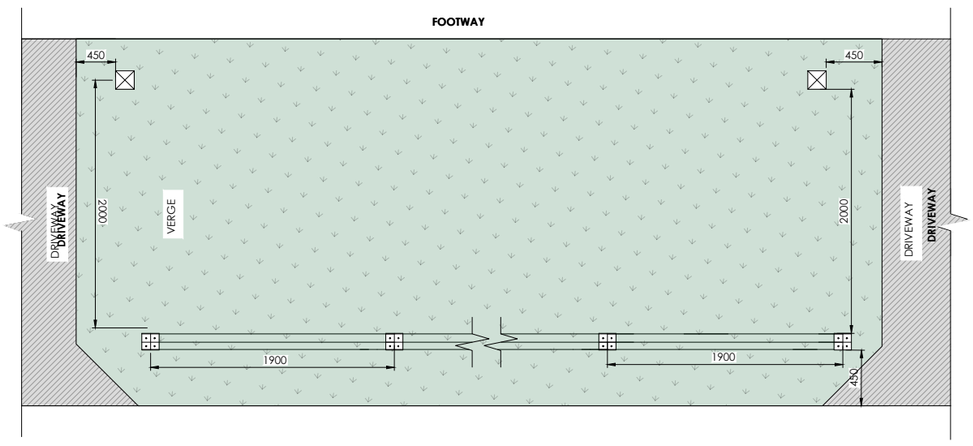

VERGES > 6m
DETAIL C : TIMBER KNEE RAIL FENCING
SCALE - 1:25




150 METRIC VIEW




ELEVATION VIEW

TIMBER BOLLARD

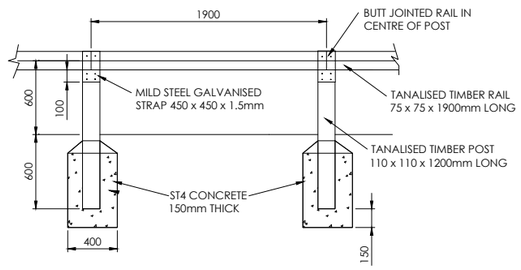

ELEVATION VIEW



SECTION VIEW

TIMBER KNEE RAIL

NOTES - GENERAL

1) ALL DIMENSIONS ARE STATED IN MILLIMETERS UNLESS NOTED OTHERWISE
2) DO NOT SACLE. PLEASE REFER TO ANY QUIERES TO THE PROJECT MANAGER/ SUPERVISOR

NOTES - FENCING

1) ALL PROPRIETARY FENCING & STREET FURNITURE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS GUIDELINES AND RECOMMENDATIONS ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE PROJECT MANAGER
2) TIMBER TO BE KILN - DRIED PRIOR TO C4 TREATMENT TO REDUCE MOISTURE RATES WITHIN THE WOOD
3) ALL STREET FURNITURE TO BE SET OUT 0.45m FROM EDGE OF CARRIAGEWAY AND DRIVEWAY ACCESSES
4) SPACINGS BETWEEN BOLLARDS TO BE NO GREATER THAN 2.0m

KEY:

- TIMBER BOLLARD
- TIMBER KNEE RAIL
- FOOTWAY EXISTING
- FOOTWAY RESURFACING
- TOPSOIL AND GRASS SEEDING
- PROPOSED KERBING

REV	DRN	CHK	APP	DATE	DESCRIPTION
P02	JS	CL	DJL	06/07/26	ACCESSIBILITY UPDATE

Wilde
Consulting Civil & Structural Engineers
Brindley Lodge, Adcroft Street, Stockport, Cheshire. SK1 3HS.
www.wildecivil.co.uk
Tel : 0161-474-7479
Fax : 0161-474-7492

Client
MEDWAY COUNCIL

Project
CITY WAY VERGES

Title
STANDARD DETAILS
_STREET FURNITURE

Scale	Drawn	Date	Chkd	Approved
AS SHOWN	JS	10/09/25	CL	DJL

Drawing No.
747_014_0110

Revision
P02

Status
PRELIMINARY

Sheet Size
A1